



jaguar industries inc

• WIRE • CABLE • TUBING


380 ROUTE 210, P.O. BOX 444 STONY POINT, N.Y. 10980
 OUTSIDE NEW YORK STATE CALL TOLL FREE 1-800-443-6528

845-947-1800
 FAX 845-947-1712

TINNED COPPER TUBULAR BRAID

DESCRIPTION: TUBULAR BRAID WOVEN FROM TINNED COPPER MEETING QQ-W-343E AND ASTM-B-33 SPECIFICATIONS.*

SPECIFICATION: MIL-SPEC QQB-575, FORMED TO OFFER A 90% MINIMUM COVERAGE WHEN PLACED OVER A MANDREL REPRESENTING THE NOMINAL I.D. OF THE PRODUCT (70% MINIMUM FOR .078" AND SMALLER I.D.).

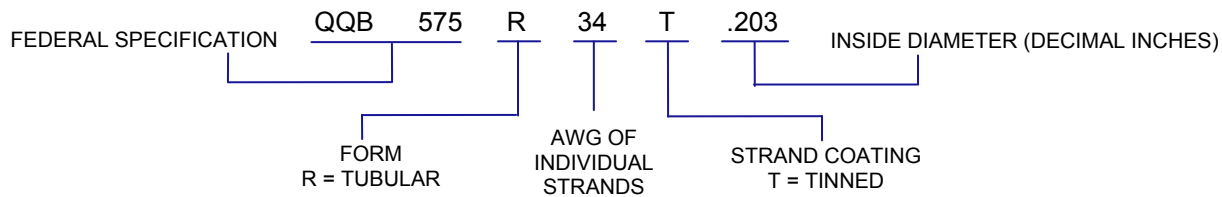

ORDERING INFORMATION: SPECIFY JAGUAR CATALOG NO.

CATALOG NO.	NOM. I.D. (inches)	NOM. I.D. (mm)	AWG IND. STRAND	NO. OF CARRIERS	TOTAL STRANDS	NOM. CMA	APPROX. AWG
JTTB-160	1/32 (.031)	0,79	36	24	24	600	22
JTTB-162	1/16 (.062)	1,59	36	24	48	1200	19
JTTB-163	5/64 (.078)	1,98	36	24	72	1800	18
JTTB-164	7/64 (.109)	2,78	36	24	96	2400	16
JTTB-166	1/8 (.125)	3,18	36	24	120	3000	15
JTTB-167	5/32 (.156)	3,97	36	24	240	6000	13
JTTB-168	11/64 (.172)	4,37	36	24	168	4200	14
JTTB-170	13/64 (.203)	5,16	34	24	192	7630	11
JTTB-170/1	13/64 (.203)	5,16	36	24	312	7800	11
JTTB-171	1/4 (.250)	6,35	36	24	384	9600	10
JTTB-171/1	9/32 (.281)	7,14	30	24	120	12060	9
JTTB-171/2	3/8 (.375)	9,53	30	24	168	16800	8
JTTB-172	3/8 (.375)	9,53	36	48	384	9600	10
JTTB-173	7/16 (.438)	11,11	30	24	240	24120	6
JTTB-173/1	1/2 (.500)	12,70	30	24	360	36000	5
JTTB-174	1/2 (.500)	12,70	36	48	528	13200	9
JTTB-175	9/16 (.563)	14,29	30	48	480	48240	3
JTTB-175/1	21/32 (.656)	16,67	30	48	768	77180	1
JTTB-176	25/32 (.781)	19,84	36	48	864	21600	7
JTTB-177	7/8 (.875)	22,23	30	48	336	33700	5
JTTB-178	1 (1.00)	25,40	30	48	384	38600	4
JTTB-179	1-1/8 (1.13)	28,58	30	48	432	43300	4
JTTB-180	1-1/4 (1.25)	31,75	30	48	480	48150	3
JTTB-181	1-3/8 (1.38)	34,93	30	48	528	53000	3
JTTB-182	1-1/2 (1.50)	38,10	30	48	576	57775	2
JTTB-183	1-7/8 (1.88)	47,63	30	48	672	67200	2
JTTB-184	2-1/4 (2.25)	57,15	30	48	768	77180	1

*SILVER PLATED AND BARE COPPER AVAILABLE, CONSULT FACTORY.