



jaguar industries inc

• WIRE • CABLE • TUBING


380 ROUTE 210, P.O. BOX 444 STONY POINT, N.Y. 10980
 OUTSIDE NEW YORK STATE CALL TOLL FREE 1-800-443-6528

845-947-1800
 FAX 845-947-1712

TINNED COPPER FLAT BRAID

DESCRIPTION: FLAT BRAID WOVEN FROM TINNED COPPER MEETING QQ-W-343E AND ASTM-B-33 SPECIFICATIONS.*

SPECIFICATION: MIL-SPEC QQB-575, FORMED TO OFFER A 90% MINIMUM COVERAGE WHEN PLACED OVER A MANDREL REPRESENTING THE NOMINAL I.D. OF THE PRODUCT (70% MINIMUM FOR .078" AND SMALLER I.D.).

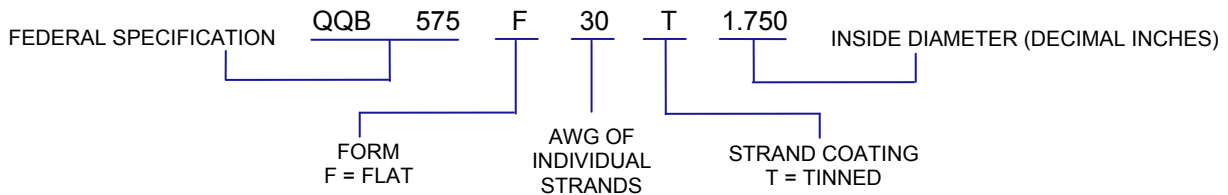

ORDERING INFORMATION: SPECIFY JAGUAR CATALOG NO.

CATALOG NO.	NOM. FLAT WIDTH (inches)	NOMINAL THICKNESS	AWG IND. STRAND	NO. OF CARRIERS	TOTAL STRANDS	NOM. CMA	APPROX. AWG
JTFB-221†	1/40 (.025)	.015	36	8	8	200	27
JTFB-222†	1/32 (.031)	.020	36	16	16	400	24
JTFB-223	3/64 (.047)	.020	36	24	24	600	22
JTFB-224†	3/32 (.094)	.020	36	16	48	1200	19
JTFB-225	1/16 (.063)	.020	36	24	48	1200	19
JTFB-226†	7/64 (.109)	.020	36	16	64	1800	18
JTFB-229	1/8 (.125)	.020	36	24	72	1800	18
JTFB-229/1	5/32 (.156)	.020	36	24	96	2400	16
JTFB-230	3/16 (.188)	.020	36	24	120	3000	15
JTFB-231	1/4 (.250)	.030	36	24	168	4200	14
JTFB-231/1	1/4 (.250)	.030	36	24	240	6000	12
JTFB-231/2	9/32 (.281)	.030	36	24	312	7630	11
JTFB-232†	3/8 (.375)	.030	36	48	288	7200	12
JTFB-233/2†	1/2 (.500)	.030	36	48	384	9600	10
JTFB-233	5/8 (.625)	.030	36	48	384	9600	10
JTFB-233/1	5/8 (.625)	.035	36	48	528	13200	9
JTFB-234	3/4 (.750)	.040	36	48	864	20800	7
JTFB-235†	1 (1.00)	.045	36	48	864	20800	7
JTFB-236†	13/16 (.813)	.045	36	48	912	22800	7
JTFB-236/1†	7/8 (.875)	.050	36	48	1056	26400	6
JTFB-237†	3/4 (.750)	.040	36	48	1608	40200	4
JTFB-238†	1-5/8 (1.63)	.080	36	48	4032	100800	1/0
JTFB-239	1-3/8 (1.38)	.050	30	48	336	33700	5
JTFB-240	1-1/2 (1.50)	.060	30	48	528	53064	3
JTFB-241†	1-3/4 (1.75)	.080	30	48	1248	125424	2/0
JTFB-242†	2 (2.00)	.120	30	48	1436	154368	3/0
JTFB-242/4†	3 (3.00)	.200	30	48	2256	225000	4/0

*SILVER PLATED AND BARE COPPER AVAILABLE, CONSULT FACTORY.

† ITEMS NOT COVERED BY QQB-575