



jaguar industries inc

• WIRE • CABLE • TUBING

380 ROUTE 210, P.O. BOX 444 STONY POINT, N.Y. 10980
 OUTSIDE NEW YORK STATE CALL TOLL FREE 1-800-443-6528

845-947-1800
 FAX 845-947-1712

MULTI-PAIR CABLE - PVC

DESCRIPTION: MULTI-PAIR CABLE FOR USE IN CONTROL, AUDIO, AND COMPUTER CIRCUITS, AND SIMILAR APPLICATIONS. PVC COLOR CODED INSULATED CONDUCTORS. FOIL SHIELDED ITEMS HAVE A SUITABLE DRAIN WIRE AND FOIL WITH BRAID ITEMS HAVE A MINIMUM BRAID COVERAGE OF 65%. SUPPLIED WITH A GRAY JACKET.

SPECIFICATIONS: UL, CSA AWM.


CONDUCTOR: STRANDED TINNED COPPER.

INSULATION: PVC.

TEMPERATURE: 80°C (90°C FOR CSA RATING).

RATING: 300 VOLTS.

ORDERING INFORMATION: SPECIFY JAGUAR CATALOG NO.

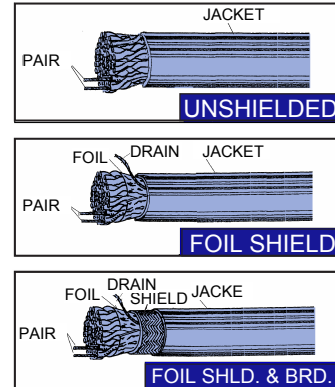

NUMBER OF PAIRS	UNSHIELDED	NOM O.D. (inches)	FOIL SHIELD	NOM O.D. (inches)	FOIL SHIELD + BRAID	NOM O.D. (inches)
# 24 AWG						
2			JPFS24-02	.280	JPFB24-02	.300
3			JPFS24-03	.290	JPFB24-03	.320
4			JPFS24-04	.320	JPFB24-04	.340
5			JPFS24-05	.340	JPFB24-05	.360
6			JPFS24-06	.355	JPFB24-06	.375
7			JPFS24-07	.370	JPFB24-07	.390
9			JPFS24-09	.400	JPFB24-09	.420
12			JPFS24-12	.430	JPFB24-12	.460
15			JPFS24-15	.470	JPFB24-15	.490
19			JPFS24-19	.500	JPFB24-19	.520
27			JPFS24-27	.570	JPFB24-27	.590
37			JPFS24-37	.630	JPFB24-37	.650
48			JPFS24-48	.690	JPFB24-48	.720
60			JPFS24-60	.750	JPFB24-60	.770
# 22 AWG						
2	JPNS22-02	.290	JPFS22-02	.300	JPFB22-02	.320
3	JPNS22-03	.310	JPFS22-03	.320	JPFB22-03	.340
4	JPNS22-04	.330	JPFS22-04	.340	JPFB22-04	.360
5	JPNS22-05	.360	JPFS22-05	.370	JPFB22-05	.390
6	JPNS22-06	.380	JPFS22-06	.390	JPFB22-06	.410
7	JPNS22-07	.400	JPFS22-07	.410	JPFB22-07	.430
9	JPNS22-09	.430	JPFS22-09	.440	JPFB22-09	.460
12	JPNS22-12	.480	JPFS22-12	.480	JPFB22-12	.500
15	JPNS22-15	.510	JPFS22-15	.520	JPFB22-15	.540
19	JPNS22-19	.560	JPFS22-19	.560	JPFB22-19	.580
27	JPNS22-27	.630	JPFS22-27	.630	JPFB22-27	.660
37	JPNS22-37	.710	JPFS22-37	.710	JPFB22-37	.730
48	JPNS22-48	.780	JPFS22-48	.780	JPFB22-48	.800
60	JPNS22-60	.890	JPFS22-60	.890	JPFB22-60	.910